



Process Equipment

Pumping Solutions for Process Industries



PROVEN QUALITY. LEADING TECHNOLOGY.

Tel: 866-777-6060
Fax: 866-777-6383

Springer Pumps, LLC

Website: www.springerpumps.com
Int'l: +001 267 404 2910

Electric Double Diaphragm Pumps

Husky™

Electric Diaphragm Pumps

Eliminate unnecessary pump failures, improve your facilities energy efficiency and create a quieter and cleaner work environment for your employees. Graco's Husky e-Series pump will help you achieve all of those items!

- Patent pending technology allows pump to **stall under pressure** preventing pump failures from clogged lines or closed valves
- **Energy efficient** electric drive reduces energy consumption up to 5x compared to traditional air operated diaphragm pumps
- Seal-less diaphragm pump design **eliminates leaking** and failures due to run-dry pump conditions

Need Low Pulsation? No Problem!


Our Husky e-Series pumps are ideal for applications that require low pulsation and a smooth flow. The air charged drive allows for the elimination or reduction of pulsation WITHOUT expensive pulsation dampness or surge tanks.

Pulsation Chart

Husky e-Series
(in low pulse mode)

AODD

Peristaltic

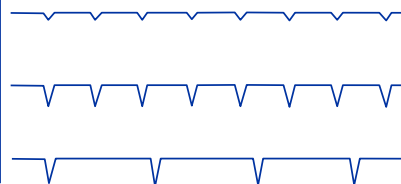

Husky 1050e

1 in (25.4 mm) connection
Max flow: 50 gpm (189 lpm)
Available in Aluminum, Stainless Steel,
and polypropylene as a stand alone
pump or cart mounted pump



Husky 2150e

2 in (50.8 mm) connection
Max flow: 100 gpm (378 lpm)
Available in Aluminum, Stainless Steel,
and polypropylene.



Find the Right Pump for Your Application

To order an air-operated or electric double diaphragm pump for your application, go to www.graco.com/process. Under related links, click on the **Online Diaphragm Pump Selector Tool** or contact your local distributor.



Air-Operated Double Diaphragm Pumps

Husky™

Pumping Technology

Our Husky air-operated double diaphragm pumps are loaded with features to help you get the job done right, every time, and are built to save you money.

Rugged construction

Resists corrosion for reliable performance and long life

Heavy-duty design - Offers long life, increased productivity and lower overall cost of ownership

Flow rates up to 300 gpm (1135 lpm)

Lube-free for cleaner operation

DataTrak™ available to prevent pump runaway and track material usage



Husky 3300

3 in (76.2 mm) connection
Max flow: 300 gpm (1135 lpm)
Polypropylene, aluminum,
stainless steel



Husky 2200

2 in (50.8 mm) connection
Max flow: 200 gpm (757 lpm)
Polypropylene, PVDF



Husky 2150

2 in (50.8 mm) connection
Max flow: 150 gpm (568 lpm)
Polypropylene, PVDF, aluminum,
stainless steel, iron



Husky 15120

1-1/2 in (38.1 mm) connection
Max flow: 120 gpm (454 lpm)
Polypropylene, PVDF



Husky 1590

1-1/2 in (38.1 mm) connection
Max flow: 90 gpm (340 lpm)
Polypropylene, PVDF, aluminum,
stainless steel



Husky 1050

1 in (25.4 mm) connection
Max flow: 50 gpm (189 lpm)
Aluminum, polypropylene, PVDF,
conductive polypropylene,
hastelloy, stainless steel

The Husky Advantage

Loaded with Options

Choose from a wide selection of materials to handle numerous applications, including corrosive and abrasive fluid transfer.

Key Fluids

- Paints, stains, coatings, inks and dyes
- Chemicals
- Acids
- Corrosive and abrasive fluids
- Lubricants
- Ceramic glazes
- Sludge, slurry and waste fluid
- Soaps, detergents and solvents

Balls



Seats



Diaphragms



Husky 1050HP

1 in (25.4 mm) connection
Max flow: 50 gpm (189 lpm)
Aluminum and stainless steel

Husky 716

3/4 in (19.1 mm) connection
Max flow: 16 gpm (61 lpm)
Aluminum, stainless steel

Husky 515

1/2 in (12.7 mm) connection
Max flow: 15 gpm (57 lpm)
Polypropylene, acetal, PVDF

Husky 307

3/8 in (9.4 mm) connection
Max flow: 7 gpm (26 lpm)
Polypropylene, acetal

Husky 205

1/4 in (6.3 mm) connection
Max flow: 5 gpm (19 lpm)
Polypropylene, acetal, PVDF

Available materials of construction and accessories may vary depending on pump model.

Hose Pumps

SoloTech™

Peristaltic Hose Pumps

With only the hose in contact with the fluid being pump and no check valves in line, Graco's SoloTech peristaltic pumps are ideal for materials that other pumps cannot handle.

- **Efficient Pumping Action** - One hose compression per revolution extends hose life
- **Low Maintenance** - No valves, seals or glands
- **Reversible** - Pumps can be used to empty lines or clear blockages
- **Extended Hose Life** - Only one hose compression per revolution




Single Roller Design

The single roller design compresses an engineered hose through a full 360 degrees of rotation, meaning the roller is only in contact with the hose once per revolution. This reduces compressions, temperature, and friction and improves hose life.

Choose from 4 different hose materials to meet your specific application requirements

Hose Design

With only the hose in contact with the fluid being pump and no check valves in line, Graco's SoloTech peristaltic pumps are ideal for materials that other pumps cannot handle. Abrasive, corrosive, shear sensitive, and gas entrapped fluids can easily be pumped or dosed into your application.

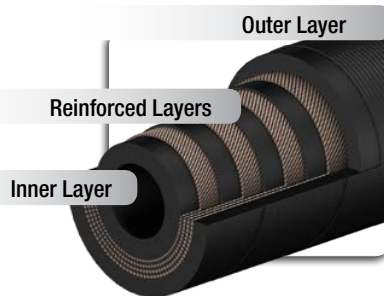

Hose Materials	Stripe Color / Inside Color	Max. Fluid Temperature	Application Area
Natural Rubber (NR)	None / Black	160°F (71°C)	Abrasives
Chlorosulfonated polyethylene (CSM)	Orange / Black	250°F (121°C)	Highly corrosive chemicals
Nitrile	Yellow / Black	220°F (104°C)	Oils or oily products
Ethylene propylene (EPDM)	Blue / Black	250°F (121°C)	Corrosive chemicals



SoloTech 10

Max flow rate of 0.5 gpm (1.9 lpm). Typically used for chemical metering applications.



SoloTech 23

Max flow rate of 5 gpm (18.9 gpm). Typically used for chemical metering applications.



SoloTech 26

Max flow rate of 10 gpm (37.8 lpm). Typically used for abrasive material transfer applications.



SoloTech 30

Max flow rate of 16 gpm (60.5 lpm). Typically used for abrasive material transfer applications

High Pressure Cleaning

Hydra-Clean®

On-Demand High Pressure Cleaning

Graco pneumatic-driven and hydraulic-driven Hydra-Clean heavy-duty pressure washers are perfect for use in a variety of in-plant cleaning applications and can be used with hot or cold water, detergents or strong chemical solutions up to 200°F (93°C). Available in wall-mount and cart-mount options

- **300 Series Stainless Steel Lower** – Compatible with many extreme chemicals and ideal for use with open-head drums
- **Supports multiple guns**
- **Five different spray tips** – Standard
- **Optional hose reel** – Easy hose storage



Pneumatic Hydra-Clean



Hydraulic Hydra-Clean

Transfer Pumps

Husky Transfer Pumps

Easily pump from 55 gallon drum with flow rates up to 16 gpm (61 lpm).

Available in aluminum, carbon steel, stainless steel and polypropylene.

- **Suction tube** immersed inside the drum
- **Quick-priming** and immediate flow of product
- **Fluid viscosities up to 5,000 cps** and solids up to 0.09 in (2.29 mm)
- **Air tight seal** for moisture-sensitive fluids
- **Bung adapter** fits into any 2 in (50.8 mm) bung opening



Fast-Flo® 1:1

Deliver a smooth, reliable flow. Drum length and stubby models are available in either carbon steel or stainless steel materials of construction.

Ideal for a variety of non-corrosive and corrosive materials.

- **Flow rates** up to 5 gpm
- **Immersed inlet** for faster priming of heavier fluids
- **Air-powered** for high reliability and low cost
- **Disc check** options for lower viscosity fluids



Ink Pumps

Pneumatic and hydraulic ink pumps with enclosed, dual seal wet cup design with an extended seal life - ideal for the most difficult inks.

- **Prolong seal life** with enclosed, dual seal wet cup
- **Runaway control** with optional DataTrak
- **MaxLife®** seal for longer life
- **Handles difficult inks**, like letterpress and lithographic



All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration.

877.84GRACO (1-877-844-7226) or visit us at www.graco.com.

©2015 Graco Inc. Form No. 300570 Rev. K 12/17 Printed in the U.S.A.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

